




外形安装尺寸 Overall dimension

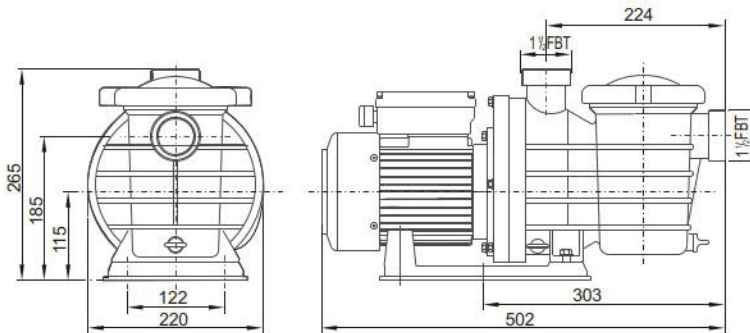

性能曲线 Performance curves

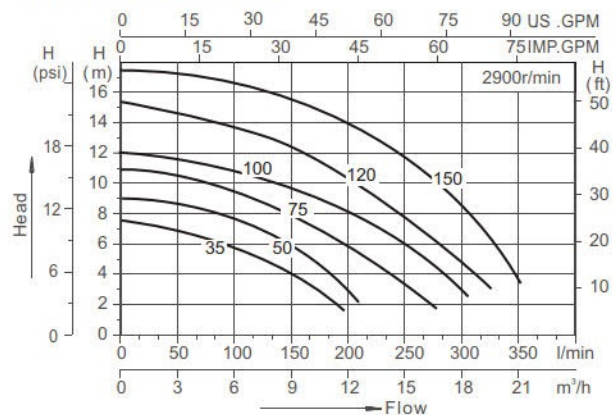

EN 60335-1
EN 60335-2-41
EN 62233
ERP547

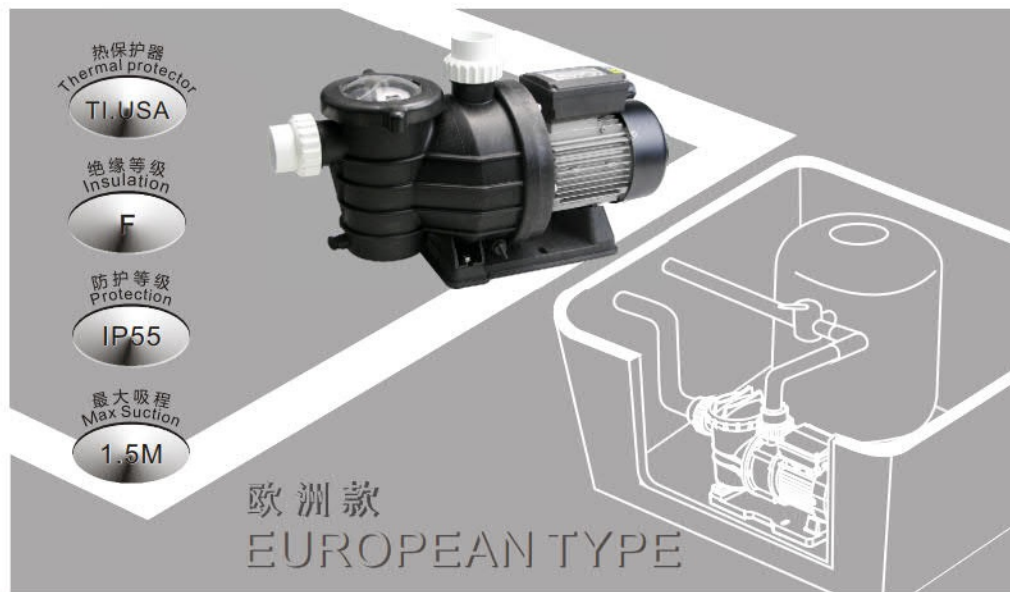

海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
SMP35	190	7.5	220-240/50	0.25	0.35	1.6	48.5or50	8.1	535×255×325
SMP50	220	9	220-240/50	0.37	0.5	2.0	48.5or50	9.3	535×255×325
SMP75	280	11	220-240/50	0.55	0.75	3.2	48.5or50	10.6	535×255×325
SMP100	310	12	220-240/50	0.75	1.0	3.8	48.5or50	11.4	535×255×325
SMP120	340	15.5	220-240/50	0.9	1.2	4.6	48.5or50	11.8	535×255×325
SMP150	350	17.5	220-240/50	1.1	1.5	5.8	48.5or50	12.8	535×255×325

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	放水螺塞 Draining Plug
5	O形圈 O-Ring
6	泵壳 Pump Casing
7	滤篮 Filter
8	O形圈 O-Ring
9	透视盖 Transparent cover
10	透视盖压盖 Gland cover of transparent cover
11	胶垫 Rubber gasket
12	导叶 Diffuser
13	叶轮螺母 Impeller Nut
14	弹簧垫圈 Spring washer

序号 NO.	名称 Name
15	O形圈 O-Ring
16	平键 Flat Key
17	叶轮 Impeller
18	机械密封 Mechanical seal

序号 NO.	名称 Name
19	O形圈 O-Ring
20	泵盖 Pump Cover
21	平垫 Pad
22	六角头螺钉 Hexagon screw
23	六角头螺钉 Hexagon screw
24	电机 Motor
25	底板胶条 Block Gine
26	底板 Base
27	六角头螺钉 Hexagon screw

